


PLAN

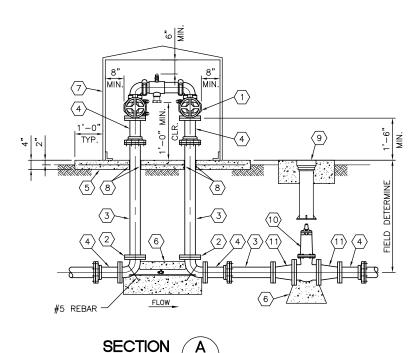

DESIGNER/ENGINEER NOTES:

- 1. PRIOR TO SELECTION OF METER/BACKFLOW
 ASSEMBLY DETAIL ENGINEER TO VERIFY EXISTING
 METER AND BACKFLOW CAPACITY, FIRE FLOW AND
 EXISTING PRESSURE AT THE ASSEMBLY
 INSTALLATION LOCATION.
- 2. BASED ON RESEARCH RESULTS, IF MORE THAN ONE STANDARD METER/BACKFLOW ASSEMBLIES OR MANUFACTURERS MAY BE UTILIZED THEN ALL APPLICABLE DETAILS ARE TO BE SHOWN ON THE DRAWINGS FOR CONTRACTOR SELECTION.
- 3. ALL ASSEMBLY PIPING, CONNECTIONS AND EASEMENT SIZES TO ACCOMMODATE THE <u>LARGEST</u> LAYOUT OPTION REGARDLESS OF CONTRACTOR SELECTION TO AVOID CONFLICTS DURING CONSTRUCTION.

REMOVE THESE NOTES WHEN DETAIL USED

MATERIAL LIST

- 4" AMES COLT 400N REDUCED PRESSURE PRINCIPLE (RPPA) BACKFLOW ASSEMBLY OR APPROVED EQUAL (NOTE 2)
- (2) PIPE SETTER, 90° FLG BEND
- (3) 4" FLG x PE DUCTILE IRON PIPE, PC 350 (CUT TO FIT)
- $\langle 4 \rangle$ 4" ADAPTER FLANGE (RESTRAINED)
- (5) CONCRETE SLAB (4" THK) WITH WELDED WIRE FABRIC, 4 x 4 W1.4 x W1.4
- 6 CONCRETE THRUST/ANCHOR BLOCK
- APPROVED ENCLOSURE (CONTRACTOR TO SUBMIT SHOP DRAWINGS)
- 8 1/2" EXPANSION JOINT MATERIAL
- 9 VALVE BOX AND COLLAR (NOTE 1)
- (10) 6" FLG GATE VALVE
- (11) 6" x 4" FLG REDUCER

NOTES:

- CONTRACTOR TO INSTALL VALVE LOCK DEVICE WITH DISTRICT PROVIDED LOCK (AS REQUIRED).
- 2. APPROVED EQUAL MATERIALS CAN BE FOUND ON THE LVVWD APPROVED PRODUCTS LIST.
- 3. 12" MIN CLEARANCE IS REQUIRED FROM THE RELIEF VALVE TO ASSEMBLY PAD. ASSEMBLY PAD FINISHED GRADE MUST BE AT OR ABOVE HIGH-WATER LEVEL OF SURROUNDING AREA.