

BARE COPPER GROUND WIRE AS INDICATED ON BANK SECTIONS.


RED CONCRETE, SHALL CONFORM TO NV ENERGY STANDARD RC-3 MIX WITH 5 LBS. DYE PER 94 LB. SACK.

#4 CONTINUOUS BAR AT ALL CORNERS.

#4 SPLIT HOOPS 24" O.C. OVERLAP SPLIT HOOPS AND SECURE WITH TIE WIRE AT TWO POINTS, EACH SIDE

RED CONCRETE ENCASEMENT

2"	2"	2"	4"
2"	2"	2"	4"

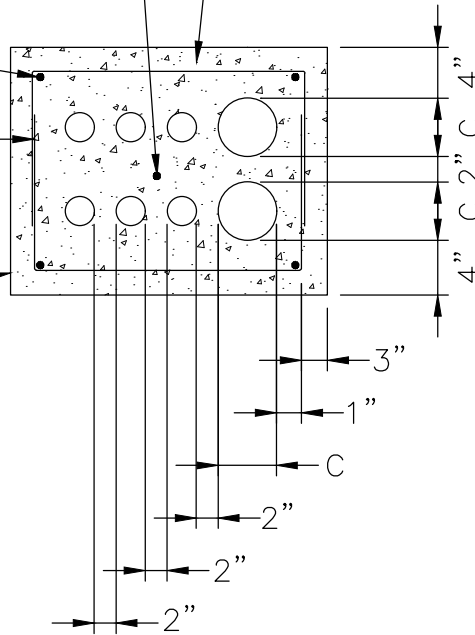

NOTE:

ACTUAL NUMBER AND SIZE OF CONDUITS MAY VARY FROM THIS DETAIL. REFER TO PLANS FOR ACTUAL NUMBER AND SIZE OF CONDUITS.

TYPICAL CONDUIT BANK DETAIL

NOT TO SCALE

E02-9

041823

