


UNIMPROVED AREA

IMPROVED AREA

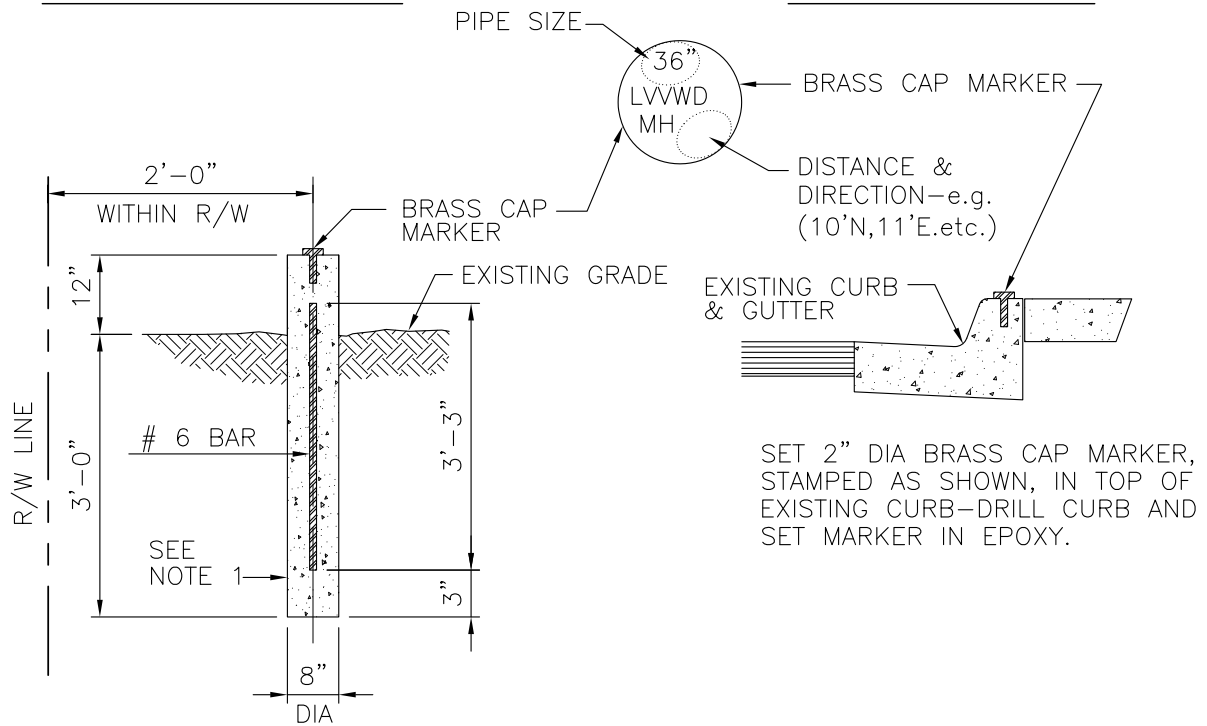

SET 2" DIA BRASS CAP MARKER
STAMPED AS SHOWN, IN 8" DIA
REINFORCED CONCRETE.

NOTES:

1. CONCRETE SHALL BE 4,500 PSI MINIMUM 28 DAYS COMPRESSIVE STRENGTH.
2. MARKER UNNECESSARY WHEN ACCESS MANHOLE CONSTRUCTED.

PIPE ACCESS ASSEMBLY MARKER

NOT TO SCALE

PL10-7 071822

