


RUN WIRING BENEATH AND BESIDE IRRIGATION MAINLINE. TAPE AND BUNDLE AT 10 FOOT INTERVALS.

TIE A 24-INCH LOOP IN ALL WIRING AT CHANGES OF DIRECTION OF 30° OR GREATER. UNTIE AFTER ALL CONNECTIONS HAVE BEEN MADE.

PLAN VIEW

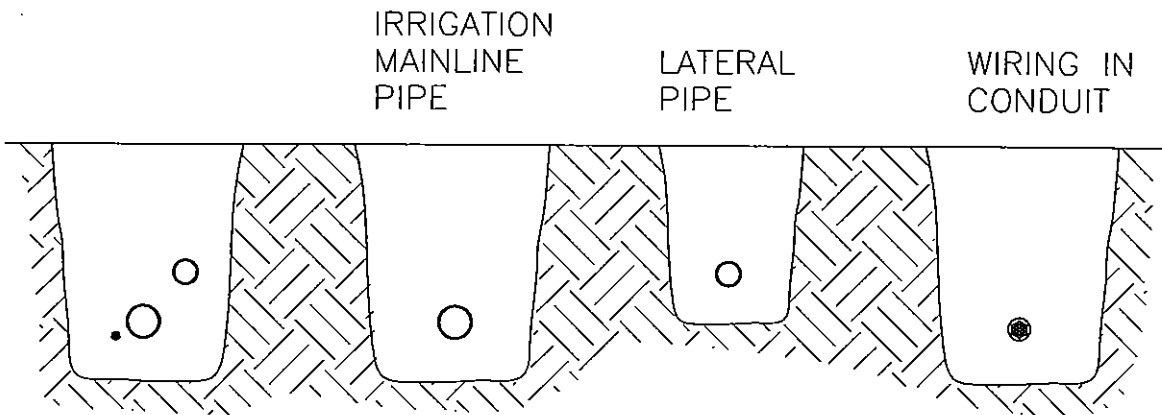

SECTION VIEW

NOTES:

1. SLEEVE BELOW ALL HARDSCAPE ELEMENTS WITH CLASS 200 PVC TWICE THE DIAMETER OF THE PIPE OR WIRE BUNDLE WITHIN.
2. FOR PIPE AND WIRE BURIAL DEPTHS SEE SPECIFICATIONS.
3. ALL SOLVENT WELD PLASTIC PIPING TO BE SNAKED IN TRENCH AS SHOWN.

IRRIGATION PIPE AND WIRE TRENCHING DETAIL

NOT TO SCALE

LS-03

071003

