



CONDITION D





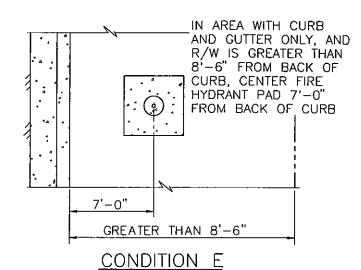


IF NO SIDEWALK, CURB AND GUTTER EXISTS, SET FIRE HYDRANT PAD ADJACENT TO R/W AS SHOWN IN CONDITION D ABOVE.

R/W GREATER THAN 3 FROM BACK OF SIDEWALK -1/2" PREMOLDED EXPANSION JOINT SET FIRE HYDRANT PAD ADJACENT TO BACK OF SIDEWALK

CONDITION C

CONDITION F



CONDITION G

