


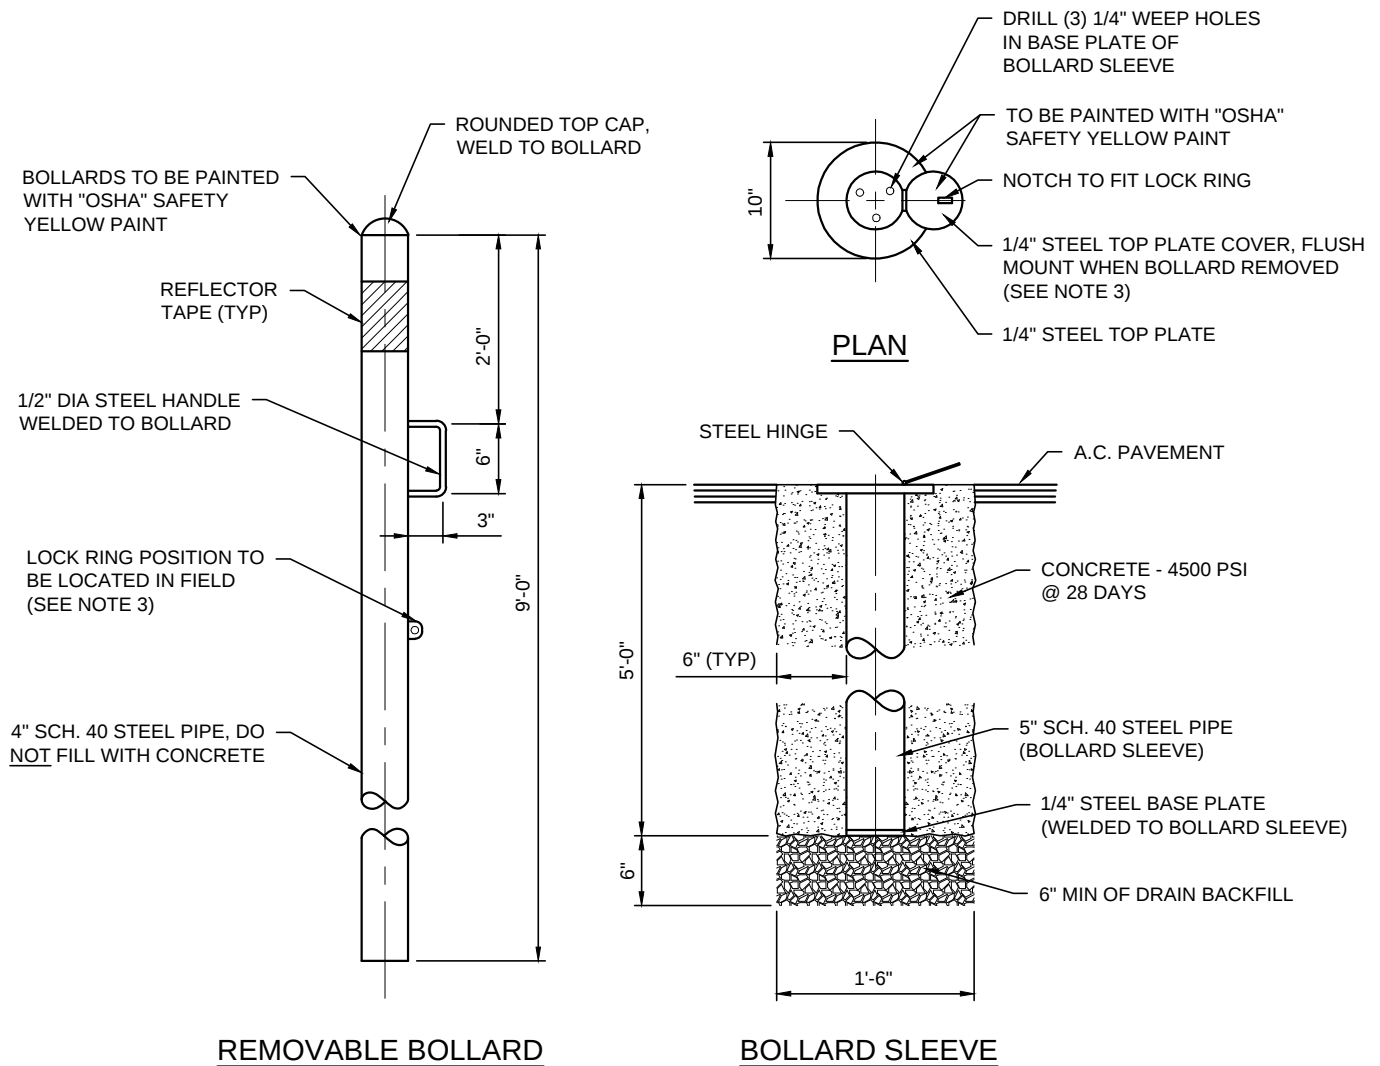

NOTES:

1. PLACE 6" WIDE, YELLOW RETROREFLECTIVE TAPE (PER USS, SECTION 716), 4" DOWN FROM TOP, FOR FULL DIAMETER ON ALL BOLLARDS.
2. CONTRACTOR TO ASSURE THAT BOLLARDS ARE PLACED TO ALLOW FULL ACCESS TO THE PROTECTED FACILITY.
3. INSTALL OWNER PROVIDED LOCK AFTER INSTALLATION IS COMPLETE.
4. CONTRACTOR TO SUBMIT SHOP DRAWING ON BOLLARD ASSEMBLY.

REMOVABLE VEHICULAR PROTECTION BOLLARD

NOT TO SCALE

PL15-4B 081826

