


DESIGNER NOTE:
FOR GENERAL NOTES SEE PL12-10

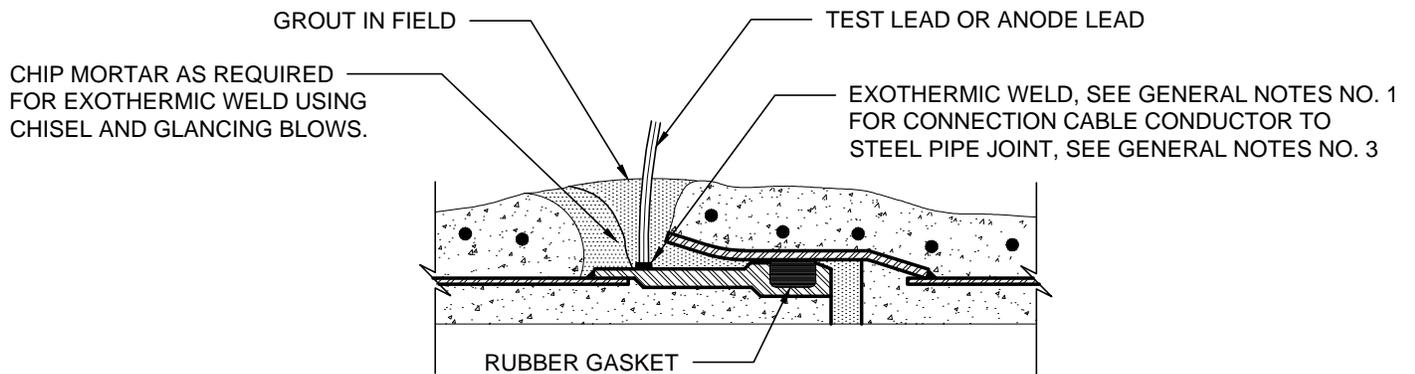

NOTE:
FOR WELDED JOINT, ATTACH TEST LEAD OR ANODE LEAD
BY EXOTHERMIC WELD TO THE EXPOSED STL END OF PIPE.

TEST LEAD OR ANODE LEAD CONNECTION TO PIPE JOINT CARNEGIE OR ROLLED-GROOCE DETAIL

NOT TO SCALE

PL12-5 070703

