


MATERIAL LIST:

NO. DESCRIPTION

- | NO. | DESCRIPTION |
|-----|--|
| 1 | 6" AIR VALVE, FLANGED INLET |
| 2 | 6" MUSHROOM VENT CAP WITH #22/24 STAINLESS STEEL MESH SCREEN |
| 3 | APPROVED ENCLOSURE (CONTRACTOR TO SUBMIT SHOP DRAWINGS) |
| 4 | 1/2" EXPANSION JOINT MATERIAL |
| 5 | 2" CURB STOP, MALE THREADED, WITH LOCKING EYE |
| 6 | 2" FEMALE THREADED BRONZE CAP |
| 7 | 5/8"-11NC BREAK-AWAY ZINC PLATED HEX HD BOLT, HEX NUT AND LOCKWASHER |
| 8 | 6" RESTRAINED FLANGE ADAPTOR |
| 9 | 6" FLG BALL VALVE - QUARTER TURN |
| 10 | 6" FLG DUCTILE IRON SPOOL (9" LONG) WITH 2" THREADED PORT OR 2" SERVICE SADDLE |
| 11 | 6" FLG x PE OR PE x PE DUCTILE IRON PC350, CUT TO FIT |
| 12 | 6" FLG x MJ (RESTRAINED) 90° DUCTILE IRON BEND |
| 13 | 6" FLG x FLG DUCTILE IRON TEE |
| 14 | CONCRETE PAD WITH #4 REBAR AT 12" O.C. |
| 15 | CONCRETE THRUST/ANCHOR BLOCK |

NOTES:

- SEE SPECIFICATIONS FOR ALL APPROVED PRODUCTS.
- INDIVIDUAL COMPONENT DIMENSIONS VARY, CONTRACTOR TO VERIFY ASSEMBLY MEETS DIMENSIONAL CLEARANCE REQUIREMENTS PRIOR TO ORDERING ENCLOSURE AND ASSEMBLY.

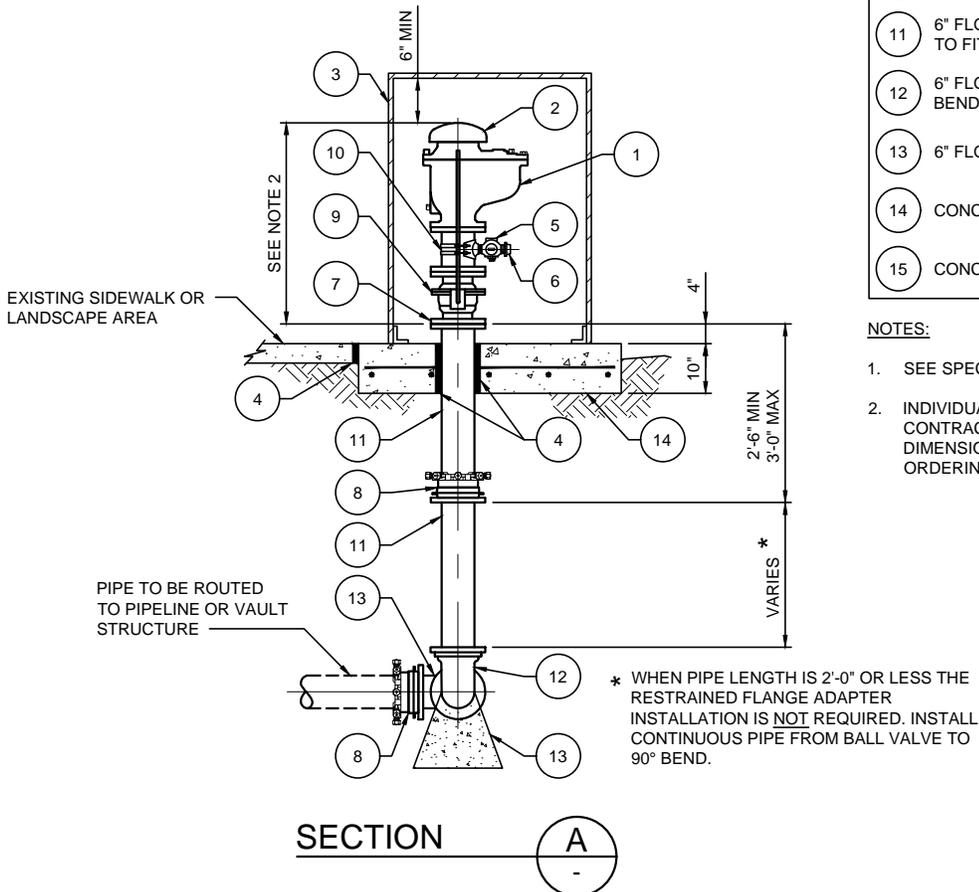

AIR VALVE ASSEMBLY FOR DUAL 6-INCH VALVES

SCALE: 1/2" = 1'-0"

PL09-1D 071322